

Desso Grezzo

12 Trendy Colours

Subtle Textured Design

Non PVC EcoBase Backing

CEHD Rating

Grezzo

 **Tarkett**

TECHNICAL DATA SHEET

Product Characteristics	Standards	Desso Grezzo
Product Construction	ISO 2424	Structured Loop Pile
Yarn Type		BCF Polyamide 6
Gauge	ISO 2424	1/10"
Primary Backing	ISO 2424	Polyester Fleece
Secondary Backing	ISO 2424	DESSO EcoBase® * - Containing on average 80% C2C positively defined recycled content
Number of Stitches	ISO 1763	1580/dm ²
Pile Weight	ISO 8543	650g/m ² 19.2 oz/yd ²
Total Weight	ISO 8543	4350 g/m ²
Pile Density	ISO 8543	0.113 g/cm ³
Thickness of pile above substrate	ISO 1766	3.5mm (+/-0.5mm)
Total Thickness	ISO 1765	7mm (+/-0.5mm)
Dimension	EN ISO 24342	500mm x 500mm
Tiles per box/area		20 /5m ²
Warranty		15 years

Performance Characteristics	Standards	Desso Grezzo
Reaction to fire	AS ISO 9239-1:2010	Critical Radiant Flux 8kW/m ² Smoke 138%.min
Australian Carpet Institute	ACCS Grading	CEHD 4* & Stairs
Electrostatic properties	ISO 6356	<2 kV
Thermal Resistance	ISO 8302	0.082 m ² K/W
Dimensional Stability	EN 986	≤ 0.2%
Noise Reduction	ISO 354	$\alpha_w = 0.20$
Impact Sound Reduction	ISO 10140	$\Delta L_w 25$ dB


Recommended specification clauses for your project:

1. Product must be Tarkett carpet tile number starting with 711793.
2. 100% Recyclable Solution Dyed Nylon 6 yarn, carpet tiles with 500mm x 500mm with EcoBase™ backing.
3. 15 year commercial manufacturer's warranty.
4. Must be installed as per manufacturer's instructions.

The information in this data sheet is correct at date of publication however, due to Tarkett's commitment for ongoing product improvement, we reserve the right to change this information without notice. Please note that Tarkett's instructions regarding installation, cleaning and maintenance must be observed. Please contact Tarkett for further information on these instructions.



For Global Green Tag certificates please see the Tarkett Australia page at globalgreentag.com

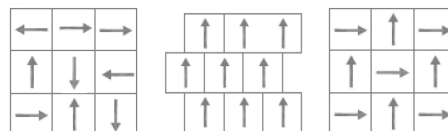

Disclaimer: Please note that products in photos are installed for creative purposes and not according to technical specifications. Please refer to Tarkett installation instructions for guidance.

Contact: Tarkett Australia
 P: 1300 851 484
 E: customerservice@tarkett.com
 W: www.tarkett.com.au

