

Design	Colour	NCS	ProtectWALL 1.5	Excellence	Platinum	Matching WR
CONCRETE	Chalk	S 2005-Y50R	264991059	CONCRETE chalk 502	MELT beige 020	24806116
	Cool Grey	S 3502-Y	264991058	CONCRETE cool grey 500	MELT medium grey 010	24806117
JUNGLE	Beige	S 0804-Y50R / S 1505-Y40R	264991073	GRANITO light beige 109	SNOW mastic 048	24806118
	Green Celadon	S 1510-B80G	264991070	UNI bright ice blue 932	MELT lagoon 013	24806120
	Grey	S 1502 - R / S 2002-R	264991072	CONCRETE chalk 502	RUBBER beige 033	24806121
	Tonic	S 1515- B80G / S 1040 -G40Y / S 2030 - B60G	264991068	UNI bright anis 931	MELT turquoise 005	24806123
MARBLE	Carrare	S 0502-G50Y	264991064	ESQUISSE light grey 013	SNOW chalk 05	24806124
TISSE	Fresh Green	S 1020-G80Y	264991028	SCANDINAVIAN OAK light beige 402	RUBBER lime 037	24806125
	Grey	S 2005-Y80R	264991004	ESQUISSE light grey 013	RUBBER beige 033	24806126
	Grey Beige	S 2005-Y20R	264991057	SCANDINAVIAN OAK light beige 402	UNI dark beige 918	24806127
	Light Aqua	S 2005-B80G	264991029	UNI intense petrole 935	SNOW petrol 043	24806128
	Light Grey	S 1000-N	264991003	TISSAGE soft grey 127	SNOW chalk 055	24806129
	Light Yellow	S 1020-Y	264991055	TISSAGE soft yellow 133	MELT yellow 003	24806130
	Warm Grey	S 0804-Y70R	264991005	OAK TREE beige 200	SALT & PEPPER white 007	24806131
	White Blue	S 2010-R90B	264991056	UNI intense jean 943	SNOW denim 042	24806132
	Blue Green	S 0502 - Y50R / S 1010-B70G	264991066	FUSION LINES intense petrole 174	UNI white 949	24806133
	Grey	S 0500-N / S 1002 - G50Y	264991065	FUSION LINES phospho 171	UNI medium grey 917	24806134
UNI	Warm Grey	S 5500-N	264991043	UNI warm grey 925	UNI warm grey 025	24806155
	Bright Ice Blue	S 1030-B50G	264991048	UNI bright ice blue 932	MELT lagoon 013	24806158
	White Grey	S 1002-Y50R	264991132	TISSAGE soft grey 127	SNOW chalk 055	24806162
	SuperWhite	S 0500-N	264991221 CR 264992061	ESQUISSE light grey 013	RUBBER beige 033	24806161
	Light Beige	S 1005-Y20R	264991122 CR 264992063	TISSAGE soft beige 129	SALT & PEPPER white 007	24806147
	Light Grey	S 2005-R	264991060 CR 264992062	TRIANGLE WOOD chalk	RUBBER beige 033	24806149



ProtectWALL

SPECIFICATION DATA
The ProtectWALL range, available in 26 decors, is a smart wall solution designed to be a heavy duty wallcovering to protect walls against shocks and scratches in heavy traffic environments. The range is 100% phthalate-free and the VOC air emission rate is very low; less than 10µg/m³. The range includes a 1.5 B-s2 version and a CR version designed for highest cleanroom standard in healthcare environments, both with a 10 year warranty.

TECHNICAL DATA	STANDARD	PROTECTWALL 1.5 B-s2	PROTECTWALL CLEAN ROOM
CLASSIFICATION			
Classification	EN 259-1 EN 14644-1	Heavy duty wall covering -	Heavy duty wall covering Clean Room Suitable Designed with a dedicated embossing to ensure hygiene in Cleanroom
TECHNICAL CHARACTERISTICS			
Total thickness	EN ISO 24346	1.50 mm	1.50 mm
Total weight	EN ISO 23997	2400 g/m²	2400 g/m²
Wear layer thickness	EN ISO 24340	0.15 mm	0.15 mm
Form of delivery	EN ISO 24341 (rolls)	20 running metres x 200 cm (40m²)	20 running metres x 200 cm (40m²)
PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 15102)			
Declaration of Performance	EN 15102	0132-0065-DoP-2022-01	0132-0065-DoP-2022-01
Reaction to fire	EN 13501-1	B-s2,d0 glued on any non-metal A1 or A2-s1,d0 class substrate	B-s2,d0 glued on any non-metal A1 or A2-s1,d0 class substrate
TECHNICAL PERFORMANCES			
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Resistance to impacts	EN 259-2	Resistant to impacts No visible burst nor crack	Resistant to impacts No visible burst nor crack
Spongeability washability Lyability brushability	EN 12956	Super washable and brushable	Super washable and brushable
Determination of flexibility	ISO 24344	No damage, no crack	No damage, no crack
Determination of seam strength	EN 684	> 250 N/50 mm	> 250 N/50 mm
Stain resistance Chemical resistance	ISO 26987	Not affected (0)	Not affected (0)
Bacteria resistance	ISO 846 part A and C	Does not favour growth	Does not favour growth
Contamination control	EN 14644-1	-	Clean Room Suitable
Ease of decontamination	ISO 8690	-	Good
ENVIRONMENTAL PERFORMANCES			
Total VOC emissions	ISO 16000	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)
COLOURS			
		23	3

The above information is subject to modification for the benefit of further improvement. (03/22).
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



■ WESTERN EUROPE: Austria: Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 47 88 062 • Belgium: Tarkett N.V. - Tel. +32 52 26 24 11 - Tel. +32 16 35 98 80 • Denmark: Tarkett A/S - Tel. +45 43 90 60 11 • Finland: Tarkett Oy - Tel. +358 9 4257 9000 • France: Tarkett SAS - Tel. +33 1 41 20 42 49 • Germany: Tarkett Holding GmbH - Tel. +49 62 33 810 • Greece: Tarkett Monoprosopi Ltd - Tel. +30 210 6745 340 • Italy: Tarkett S.p.A. - Tel. +39 0744 7551 • Luxembourg: Tarkett GDL SA - Tel. +352 949 211 8804 • Netherlands: Tarkett BV - Tel. +31 416 685 491 • Norway: Tarkett AS - Tel. +47 32 20 92 00 • Portugal: Tarkett SA - Tel. +351 21 427 64 20 • Spain: Tarkett Floors S.L. - Tel. +34 91 358 00 35 • Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 • Switzerland: Tarkett Holding GmbH - Tel. +41 043 233 79 24 • Turkey: Tarkett Aspen - Tel. +90 212 213 65 80 • United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 854 040 • EASTERN EUROPE: Baltic Countries: Tarkett Baltics - Tel. +370 37 252 220 • Czech Republic: Tarkett org. s.r.o. - Tel. +420 271 001 600 • Hungary: Tarkett Polska SP. Z O.O. magyarországi fióktelepe - Tel. +36 1 437 8150 • Poland: Tarkett Polska Sp. z o.o. - Tel. +48 22 16 09 231 • Russian Federation: ZAO Tarkett RUS - Tel. +7 495 775 3737 • Slovakia: Tarkett Polska organizacni zlozka - Tel. +421 2 48291 317 • South East Europe: Tarkett SEE - Tel. +381 21 7557 649 (44) 569 12 21 • Ukraine: Tarkett UA - Tel. +38 (0) 44 35 45 621 ■ ASIA AND OCEANIA: Australia: Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00 • China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 • North East Asia: Tarkett Hong Kong Limited - Tel. +852 2511 8716 • India: Tarkett Flooring India Pvt. Ltd. - Bangalore - Tel. +91 80 4130 3793 - New Delhi - Tel. +91 11 4352 4073 - Mumbai - Tel. +91 22 2648 8750 • South East Asia: Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ AFRICA: Tarkett International: Tel. +33 1 41 20 41 01 ■ MIDDLE EAST: Tarkett Middle East: Tel. +961 1 51 3363/4 • Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ NORTH AMERICA: USA: Tarkett Inc. - Tel. +1 713 869 5811 / Johnsonite - Tel. +1 440 543 8916 • Canada: Tarkett Inc. - Tel. +1 450 293 3173 ■ LATIN AMERICA: Brazil: Tarkett Brazil - Tel. 55 12 9954 7100 • Argentina - Chile - Uruguay: Tarkett Merosour - Tel. +54 11 47 08 0772, +54 9 11 44 46 88 82 • Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett Latam - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 • Mexico / Central America: Tarkett Mexico - Tel. +55 11 98410 9310

Printed on recyclable paper and cardboard

Customs Tariff: 4920500000

ProtectWALL - 05/22

ProtectWALL

HETEROGENEOUS VINYL WALLCOVERING

Designed for impact



Create distinct spaces from floors to wall

In turbulent Education and Health Care environments, and humming Hospitality and Office areas, save walls from rough treatment and the repeated necessity of renovation. ProtectWALL extends Tarkett's expertise in hygiene and durability to wall surfaces. And like all of Tarkett's heterogeneous (HE) premium collections, it is 100% phthalate-free.

Use ProtectWALL in both technical and general areas to deliver ten years of protection from scratches, impacts and staining agents. Choose from block colours, prints, unique linear designs and smart patterns that hide scratches and impacts. Coving, hot welding, caps and corners finish off the space for an entirely seamless installation.

ProtectWALL CR is certified for safe use in clean rooms and laboratories. Cleaning and maintenance are effortless and economical.

ProtectWALL has one of the widest selections of design options available. Tarkett's Excellence, Platinum and Stairs collections are designed to create beautiful spaces as they harmonize effortlessly with ProtectWALL.

Exceptional impact and scratch resistance
EN259-2 – Excellent with no visible burst not crack

Highly resistant to chemical substances
ISO 26987 - Rated Not affected - by most substances

Highly resistant to bacteria
ISO 846 – Does not encourage bacterial growth

Very low TVOC level
ISO 16 000 - TVOC emission levels: 10µg/m³ (after 28 days)

Priority to hygiene
No place for germs to gather
ProtectWALL vastly reduces germ infiltration by limiting the number of joints necessary – possible sites where germs can reside – thanks to continuous installation and flexibility.

10 times fewer joints*


Installation and maintenance savings

50% savings over 10 years vs paint & stiff plates

Particle emissions
ISO 14644-1: Clean Room suitable material
Highest cleanroom standard in healthcare environments**

Phthalate-free
ProtectWALL do not contain phthalate plasticisers

ProtectWALL 1.5 & Clean Room

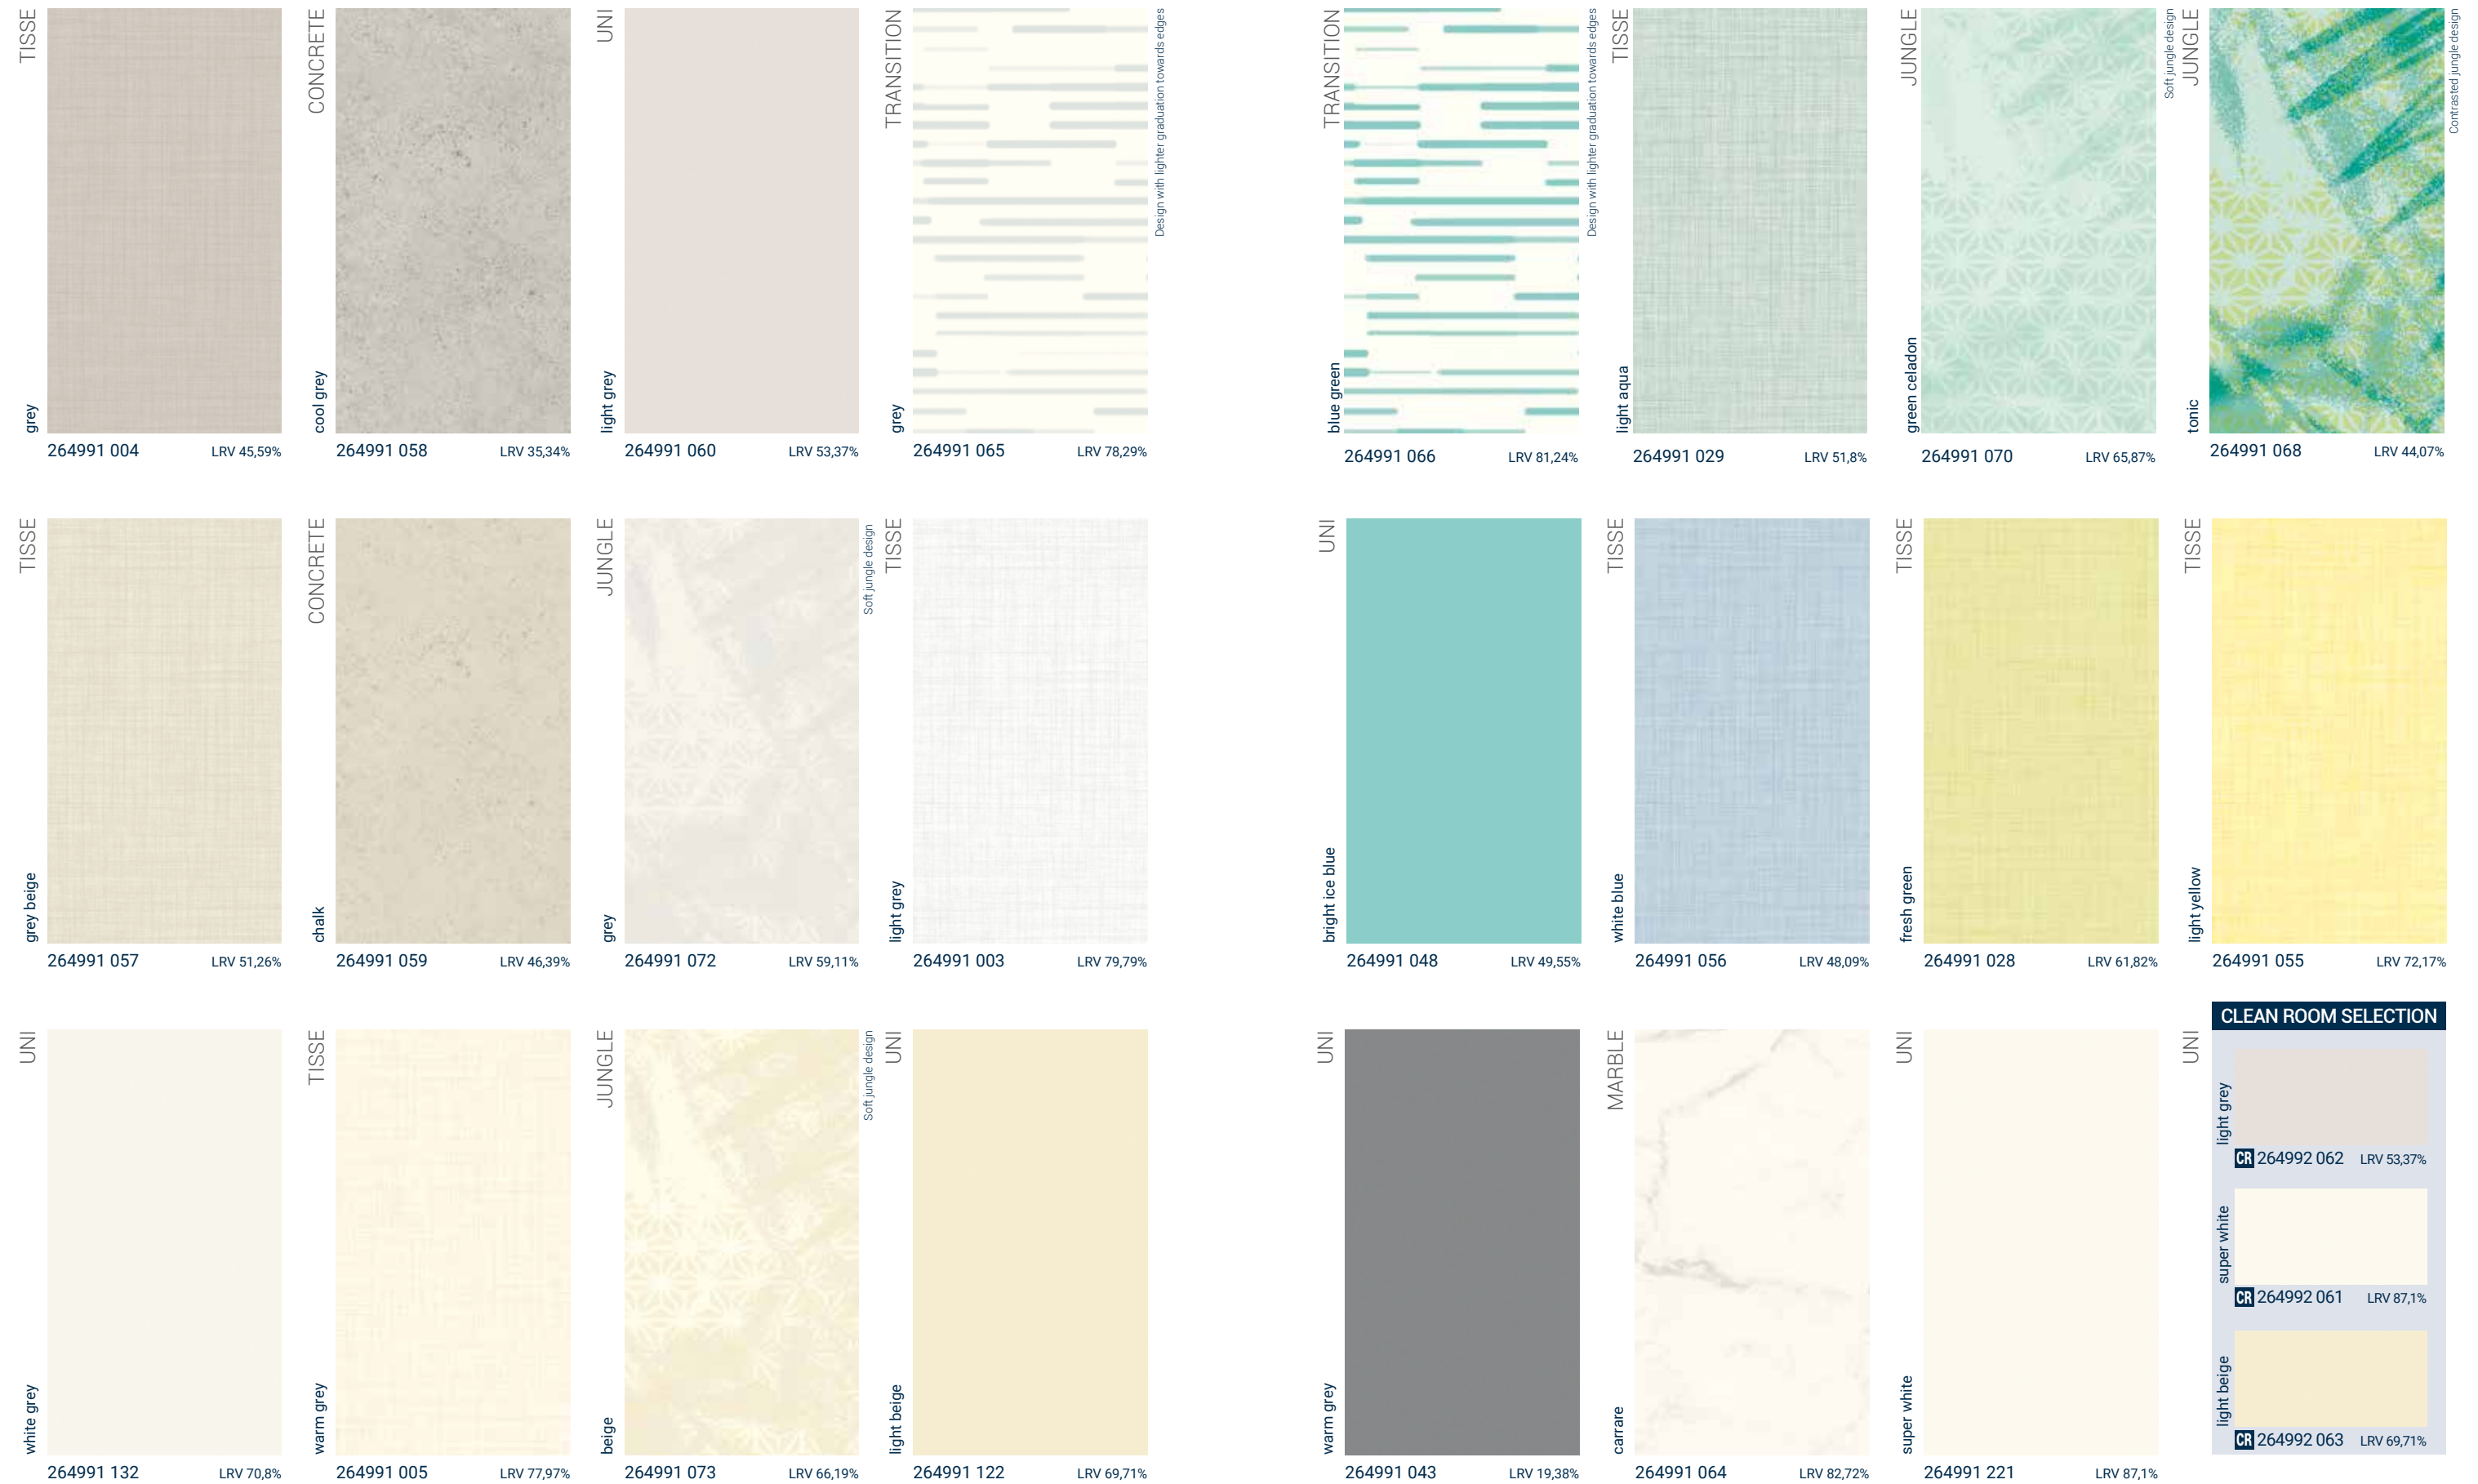

*vs stiff plates (30m corridor). **Tarkett level certified by the Fraunhofer Institute.